




HEAVY DUTY HIGH PRECISION DRILL PRESS VISE WITH LOCK DOWN JAW MECHANISM

Down Thrust / Light


精密度 / 角固式 / 輕便虎鉗

角固式 / 輕便型


- MODEL • 07860100 DV-100
• 07860130 DV-130
• 07860160 DV-160

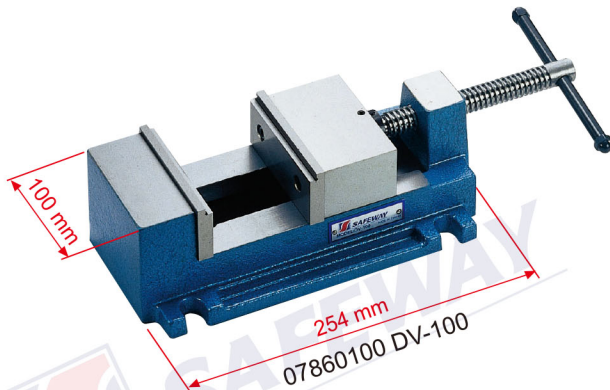

07860100 DV-100

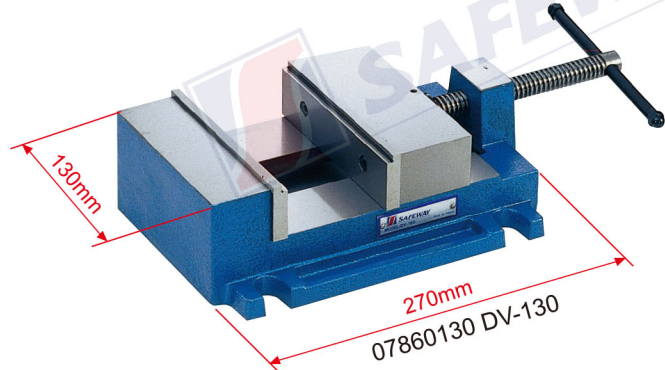

07860130 DV-130

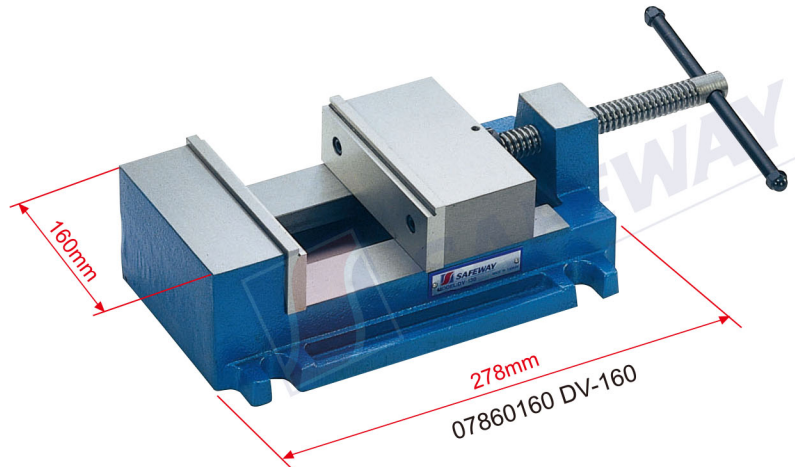

07860160 DV-160


PATENTED / 專利在案

FEATURES :

- Lock down jaw mechanism, eliminates jaw lifting and work-piece titling.
- Clamping system: Lead screw.
- High tensile ductile iron. (FCD45)
- Vise bottom and sliding ways are precision grinding.
- Step jaw plates are hardened to HRC52° and precision ground.
- Precision lead screw supported by steel balls design for smoother.
- Most suitable for drilling machines

特性：

- 角固式機械設計，可消除虎口上浮和工件傾斜。
- 夾緊系統：螺桿夾緊。
- 材質採用高強度球狀石墨化鑄鐵FCD-45。
- 虎鉗底部及滑動面均採精密研磨。
- 虎口採階梯型設計，並硬化熱處理HRC52°且經精密研磨。
- 傳動螺桿支持點採軸承設計，使傳動螺桿更平順。
- 傳動螺桿採精密機械加工並倒角（非滾牙）。
- 本虎鉗設計精巧最適合精密鑽孔加工用。

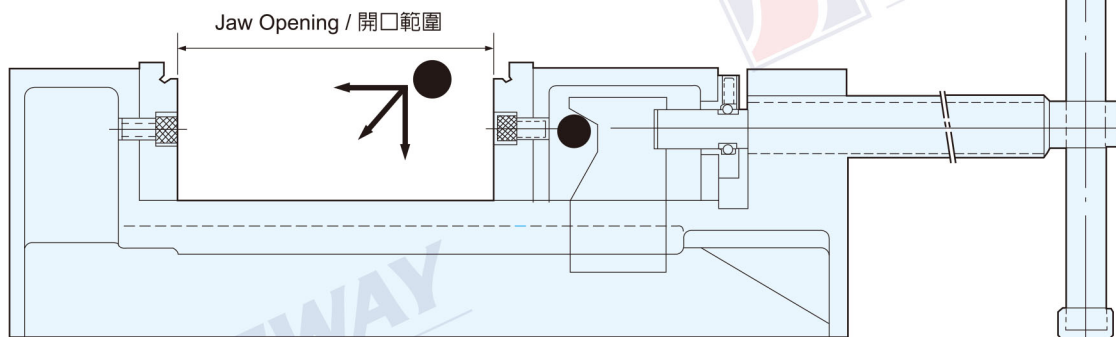

Unit: mm

| Order NO. 訂購編號 | Model 型號 | Jaw Width 鉗口寬度 | Jaw Height 鉗口高度 | Jaw Opening 開口範圍 | N.W. 淨重 | G.W. 毛重 | Shipment Size 裝箱尺寸 | Remark 備註 |
|-------------------|-------------|-------------------|--------------------|---------------------|------------|------------|-----------------------|--------------|
| 07860100 | DV-100(4") | 100 | 42 | 0~90 / 100 | 6.0kg | 6.2kg | 310x150x85 | |
| 07860130 | DV-130(5") | 130 | 44 | 0~100 / 110 | 8.2kg | 8.4kg | 327x188x94 | |
| 07860160 | DV-160(6") | 160 | 44 | 0~105 / 115 | 10.1kg | 10.4kg | 340x224x100 | |